

# Category 6A FTP Die-casting Keystone Jack | Shielded RD-03-3F21

Coupler  
Kuplör


## General Properties

Category 6A 180° Shielded Die-Casting Keystone Jacks are shielded and provide best performance and link quality for your network. They are equipped with 2 RJ45 sockets with the assignment 1:1 and are therefore suitable for mounting in Patch Panels.



## Genel Özellikler

Kategori 6A 180° Shileded Die-Casting Keystone Jack'leri korumalıdır ve ağız için en iyi performansı ve bağlantı kalitesini sağlar. 1:1 atamalı 2 RJ45 soket ile donatılmışlardır ve bu nedenle Bağlantı Panellerine montaj için uygundur.

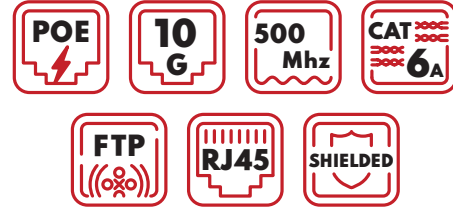

## Key Properties | Ana Özellikler

- |                                 |                              |
|---------------------------------|------------------------------|
| 1. Shielded 2x RJ45 Female      | 1. 2 adet RJ45 Korumalı dişi |
| 2. Compatible with Patch Panels | 2. Patch Panel için uygundur |


## Transmission Properties | İletim Özellikleri

Category 6A 10GBase-T, 500 MHz  
ISO/IEC 11801 3rd Edition, EN 50173-1  
Suitable for PoE/PoE+/4PPoE (IEEE 802.3af, 802.3at, 802.3bt)

## Compatibility | Uyumluluk

Compatible REÇBER Patch Panels	RD-04-2U24-1
Uyumlu REÇBER Patch Paneller	RD-04-2F24-1
Design Compatible Modular Wall Outlets	RD-05-1001, RD-05-1002
Tasarıma Uyumlu Modüler Duvar Prizleri	RD-05-1003

## Product Dimensions | Ürün Boyutları

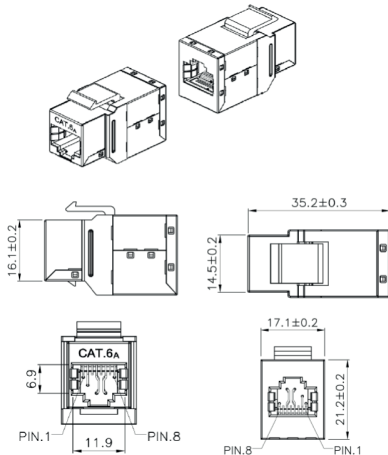

## Technical Properties | Teknik Özellikler

<b>Housing Material</b>	Brass sheet, shining nickel plated
Gövde Malzemesi	Pirinç sac, parlak nikel kaplama
<b>Contact Material</b>	Phosphor Bronze
Kontakt Malzemesi	Fosforlu Bronz
<b>Contact</b>	Nickel, Gold Plated 0.5 µ
Temas	Nikel, Altın Kaplama 0,5 µ
<b>PCB Material</b>	FR4, 1.2 mm thickness
PCB Malzemesi	FR4, 1,2 mm kalınlık

## Physical Properties | Fiziksel Özellikler

<b>Insertion Force</b>	max. / maks.	30N
Ekleme Kuvveti		
<b>Retention Strength</b>	between jack and plug	7.7 kg
Tutma Gücü	jak ile fiş arasında	
<b>Operation Temperature</b>	ISO/IEC 11801	-10°C to +50°C
Çalışma Sıcaklığı	ANSI/TIA 568 C.2	
<b>Mating Cycles Female</b>	ISO/IEC 11801	≥ 750
Plug Tak-Çıkar Miktarı	IEC 60603-7-5	

## Product Code Product Description

Ürün kodu Ürün Açıklaması

RD-03-3F21 Category 6A FTP Die-casting Keystone Jack | Shielded